



since 1933

DANIEL B. KRIEG, INC.


4200 PAXTON STREET
HARRISBURG, PA 17111
800-334-4929
FAX 717-558-2036

1130 ZINNS QUARRY ROAD
YORK, PA 17405
717-854-3186
FAX 717-845-8735

DBE /WBE #097K

PREQUALIFICATION #K123

CALL TODAY FOR A QUOTE ON PROFESSIONAL INSTALLATION OF PAVING OVERLAY FABRIC

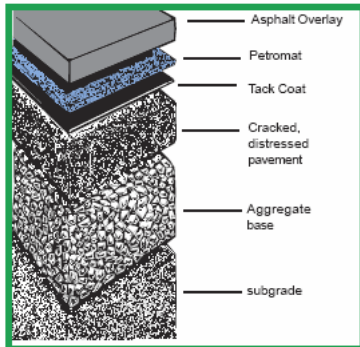

The Petromat[®] System extends the life of new asphalt concrete (AC) pavements and AC overlays. The Petromat System consists of Amoco's Petromat non-woven polypropylene fabric which is field saturated with an asphalt cement tack coat. When placed between pavement layers, the Petromat system becomes an integral part of the roadway section, forming a barrier to water infiltration and absorbing stresses to reduce reflective and fatigue cracking of the new AC surface layer. Since 1965, the economical Petromat System has had an outstanding record of improving pavement performance while reducing maintenance and roadway life-cycle costs. Paving fabric systems are currently being used at a rate of over 15,000 equivalent lane miles per year in North America alone.



Reduction In Overlay Reflective Cracking With The Petromat System Compared To Control Sections With No Fabric

